


Renoplast RENODRAIN XL

PATIO CHANNEL DRAINAGE SYSTEM

RENODRAIN XL patio channel drainage system has been designed for patios with pedestal floors raised above the underlying on-grade structural slab.

Besides efficient evacuation of rainwater RENODRAIN XL system offers neat finishing of patio fascia surfaces.

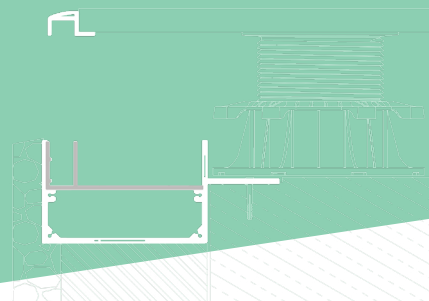

KEY FEATURES

- efficient drainage of water from the patio waterproof barrier
- firm restraint for the paving
- long-term durability and full corrosion resistance

TECHNICAL DATA

BODY	AW 6060 aluminium alloy
WEIGHT	3000 g/mb
LENGTH	200 cm
WIDTH	15 cm
COATING SYSTEM	RENODRAIN XL system are sold uncoated or coated with 0.6 - 1.2 g/m ² conversion coating, and min. 60 µm polyester powder coating.

INSTALLATION TOOLS

You will need the following tools: folding ruler, spirit level, knife, electric drill, hand-held mixer, steel plastering trowel, string line, pencil, spatula, metal handsaw or circular saw. Circular saw should be equipped with an aluminium cutting blade to cut without damaging the coating.


AUXILIARY COMPONENTS



**RENODRAIN 90
EXTERNAL CORNER**




**RENODRAIN R+L
STOPENDS**



**STAINLESS STEEL (UNCOATED)
SLIDE-IN CONNECTORS
dia 5 mm**



**RENODRAIN XL
FASCIA BRACKET
6 cm**



**RENODRAIN XL 90 FASCIA
EXTERNAL CORNER BRACKET**



**RENOPAD PRO
PEDESTAL**



**W20Z FASCIA
COPING**



**W20Z 90 EXTERNAL
FASCIA COPING CORNER**



**W20Z 135 EXTERNAL
FASCIA COPING CORNER**



**W20Z 90 INTERNAL
FASCIA COPING CORNER**



**W20Z 135 INTERNAL
FASCIA COPING CORNER**

BASE

The base must be sound, level and clean. Screeds should be of min. C20 strength and should cure for 28 days. A recess, 3mm deep by 80 mm wide, should be formed around the floor perimeter to allow setting the drip edge flush with the screed top surface. This recess may be blocked out with block-out strip (supplied on request) in the case of new screed layers. In existing screeds the recess should be milled to the required depth and width (80 mm by 3 mm).

AMBIENT CONDITIONS DURING INSTALLATION


Ambient conditions should be as typically required for waterproofing and installation work.

Renoplast RENODRAIN XL

PATIO CHANNEL DRAINAGE SYSTEM

RENODRAIN XL patio channel drainage system has been designed for patios with pedestal floors raised above the underlying on-grade structural slab.

Besides efficient evacuation of rainwater RENODRAIN XL system offers neat finishing of patio fascia surfaces.

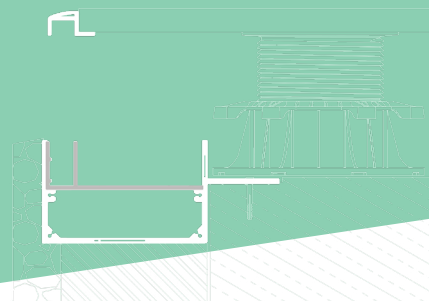

COLOURS

Standard colours: RAL 7037 dusty grey, RAL 7024 graphite grey, RAL 8019 grey brown. Other colours from RAL Classic chart are available on request.

INSTALLATION

RENODRAIN XL channels should be set on a sealing slurry or flexible sealant layer, and secured in place with plugs. Follow the installation guide available at: <https://www.renoplast.pl/download>.

SEE PRODUCT →



INSTALLATION GUIDELINES


Protect the paint coat from damage during installation. Reject any damaged components. Any dirt should be removed from the surfaces using water and non-abrasive cloth. Wet materials, such as sealing slurry or tile adhesive should be removed from the outer surfaces before drying. The manufacturer shall not be liable for any damage resulting from product misuse or using inadequate auxiliary materials or tools. All work must be in compliance with construction plans, product data sheet, relevant standards, good construction practice and safety requirements.

MAINTENANCE GUIDELINES


For cleaning use clean water with some detergent. Do not use highly acidic or high alkaline cleaners or surfactants, which may react with aluminium. Do not use organic solvents containing esters, ketones, aromatic compounds, glycol esters, chlorinated hydrocarbons, etc. After cleaning rinse the surfaces with cold clean water. In winter do not use salt or other de-icing chemicals. We recommend to check the condition of the relevant terrace, patio and balcony components every six months. Immediately remove any discovered defects.

DIMENSIONS


CROSS-SECTIONS:

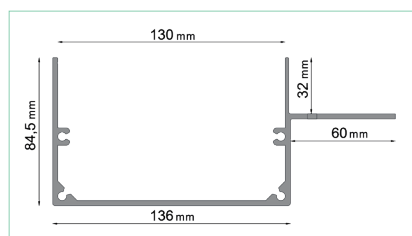


RENODRAIN CHANNEL DRAIN




RENODRAIN 90
EXTERNAL CORNER




RENODRAIN XL 90 FASCIA
EXTERNAL CORNER BRACKET




RENODRAIN XL
FASCIA BRACKET



RENODRAIN R+L
STOPENDS



W20Z FASCIA COPING




W20Z 90 EXTERNAL
FASCIA COPING CORNER

Renoplast RENODRAIN XL


PATIO CHANNEL DRAINAGE SYSTEM

RENODRAIN XL patio channel drainage system has been designed for patios with pedestal floors raised above the underlying on-grade structural slab.

Besides efficient evacuation of rainwater RENODRAIN XL system offers neat finishing of patio fascia surfaces.

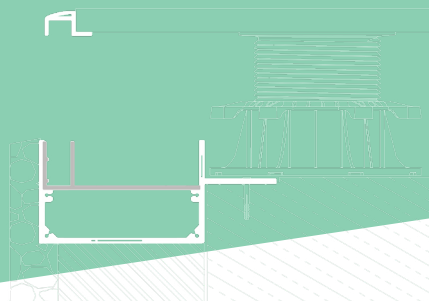

INSTALLATION EXAMPLE

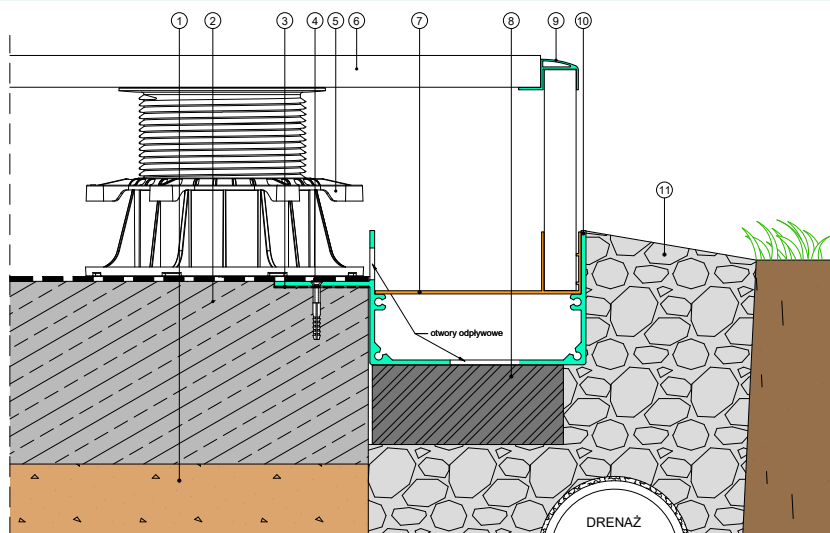

1. Patio subbase
2. Concrete base
3. Elastic adhesive/sealant
4. Waterproof barrier (EPDM membrane)
5. RENOPAD PRO pedestal
6. 20 mm thick paver
7. RENODRAIN XL fascia bracket
8. Isolated footing
9. W20Z fascia coping
10. RENODRAIN XL drainage channel
11. Drainage aggregate



Notes:

Edition: 10.08.2026. This product brochure supersedes all previous editions. It gives recommendations for standard application conditions only, and thus shall not be used in place of installation drawings. Suitability of our products for particular conditions should be verified by the contractor. The actual product specifications may vary slightly due to allowable process or tool dimension changes. Any materials used in combination with Renoplast products must be obtained from reputable sources. Our liability for any omissions or inaccuracies of the data given in this brochure is limited to gross disinformation and/or negligence.

Renoplast

RENOPLAST Sp. z o.o.
phone: +48 697 635 580
office@renoplast.pl
www.renoplast.pl/en

